



SEP1707E SERIES~ High Current Power Inductors



PART NUMBERING SYSTEM


SEP	1707E	—	6R8M	—	LF
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

FEATURES :

- * Magnetically shielded low DC resistance .
- * Frequency range up to 750 kHz .
- * Handles high transient current spikes without saturation. **DC Current up to 55A .**
- * Ultra low buzz noise, due to composite construction
- * Application for DC/DC converter and PDA/notebook/desktop/server .


SHAPES AND DIMENSIONS :

UNIT : mm

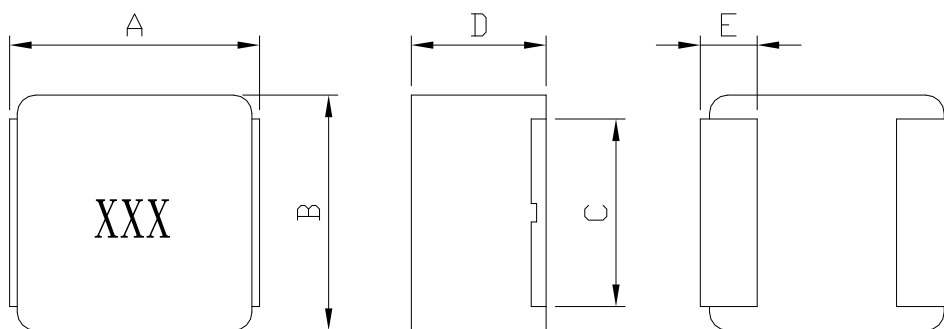

A=17.45 Max. B=17.15 Max. C=11.94±0.3 D=7.0 Max. E=2.11±0.3

RECOMMENDED PATTERNS

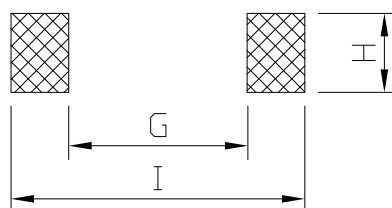

G=11.68 H= 12.19 I= 18.03

SEP1707E SERIES~ High Current Power Inductors



SPECIFICATION TABLE

PART NUMBER	INDUCTANCE (μ H)	I _{sat} (A) (Typ.)	I _{rms} (A) (Δ t) 40°C (Typ.)	DCR (m Ω) (Max.)	DCR (m Ω) (Typ.)	Test Freq. (KHz)
SEP1707E-R33M-LF	0.33 \pm 20%	55.0	75.5	0.67	0.61	100KHz/0.25V
SEP1707E-R47M-LF	0.47 \pm 20%	62.0	64.5	0.87	0.78	100KHz/0.25V
SEP1707E-R56M-LF	0.56 \pm 20%	66.0	61.0	0.91	0.83	100KHz/0.25V
SEP1707E-R82M-LF	0.82 \pm 20%	45.0	56.5	1.08	0.98	100KHz/0.25V
SEP1707E-1R0M-LF	1.00 \pm 20%	32.0	55.5	1.27	1.22	100KHz/0.25V
SEP1707E-1R5M-LF	1.50 \pm 20%	31.0	48.0	1.62	1.54	100KHz/0.25V
SEP1707E-2R2M-LF	2.20 \pm 20%	28.0	43.5	1.98	1.85	100KHz/0.25V
SEP1707E-3R3M-LF	3.30 \pm 20%	27.0	35.0	2.93	2.79	100KHz/0.25V
SEP1707E-4R7M-LF	4.70 \pm 20%	21.0	30.0	4.18	3.98	100KHz/0.25V
SEP1707E-5R6M-LF	5.60 \pm 20%	21.0	28.0	4.44	4.23	100KHz/0.25V
SEP1707E-6R8M-LF	6.80 \pm 20%	18.5	22.5	6.15	5.86	100KHz/0.25V
SEP1707E-8R2M-LF	8.20 \pm 20%	18.0	21.0	8.10	7.71	100KHz/0.25V
SEP1707E-100M-LF	10.0 \pm 20%	17.0	19.0	9.33	8.89	100KHz/0.25V
SEP1707E-150M-LF	15.0 \pm 20%	12.0	14.0	14.4	13.7	100KHz/0.25V
SEP1707E-220M-LF	22.0 \pm 20%	9.5	12.0	21.0	20.0	100KHz/0.25V
SEP1707E-330M-LF	33.0 \pm 20%	9.0	10.7	37.0	35.1	100KHz/0.25V
SEP1707E-470M-LF	47.0 \pm 20%	8.6	8.7	42.7	40.7	100KHz/0.25V
SEP1707E-560M-LF	56.0 \pm 20%	4.2	7.2	57.8	55.0	100KHz/0.25V
SEP1707E-680M-LF	68.0 \pm 20%	4.5	6.1	75.7	72.1	100KHz/0.25V
SEP1707E-820M-LF	82.0 \pm 20%	4.5	5.5	91.7	87.3	100KHz/0.25V
SEP1707E-101M-LF	100.0 \pm 20%	4.0	5.0	110.0	105.0	100KHz/0.25V


- Operating temperature range - 55 °C to + 125 °C
- I_{sat} : DC current (A) that will cause L0 to drop approximately 20 %
- I_{rms} : DC current (A) that will cause an approximate Δ T of 40 °C
- The part temperature (ambient + temp. rise) should not exceed 125 °C under worst case operating conditions.



SEP1707E SERIES~ High Current SMD Power Inductors



PACKAGING SPECIFICATION

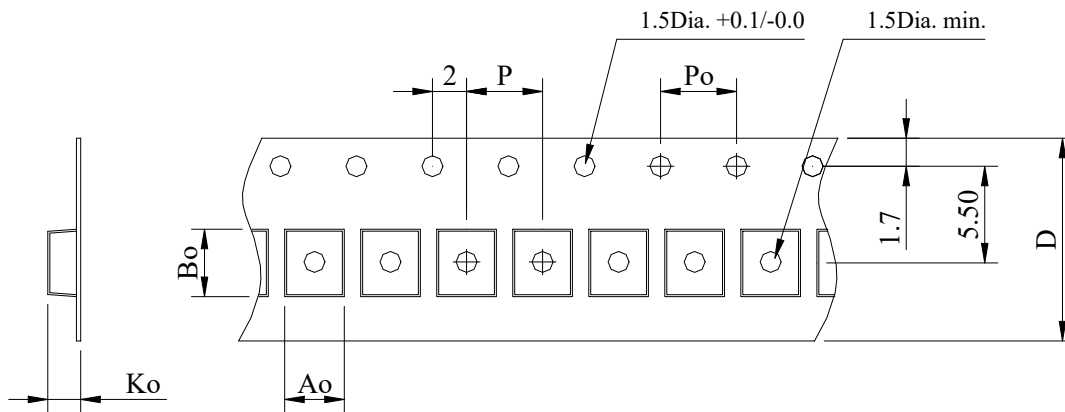

STAYLE	Q'TY (PCS)	DIMENSIONS (m/m)					
		A_o	B_o	K_o	P	P_o	$D \pm 0.3$
13"	300	17.5	18.0	7.5	20	4.0	24