



## SDS127BH SERIES ~ High Temperature Power Inductors




### PART NUMBERING SYSTEM

<b>SDS</b>	<b>127BH</b>	—	<b>680M</b>	—	<b>LF</b>
TYPE	DIMENSIONS		INDUCTANCE		LEAD FREE

### SHAPES AND DIMENSIONS


UNIT : mm

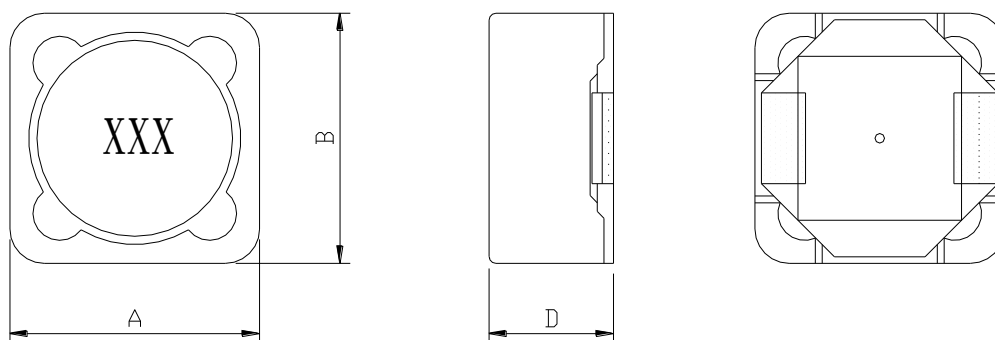

A=12.5 Max. B=12.5 Max. D=8.05Max.

### RECOMMENDED PATTERNS

UNIT : mm

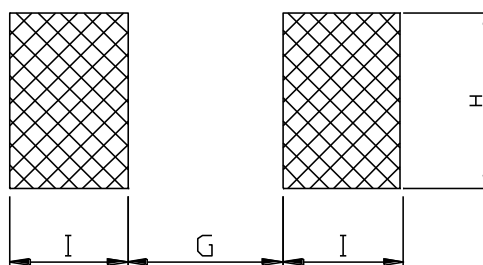

G= 6.0 H= 7.0 I = 4.00



## SDS127BH SERIES ~ High Temperature Power Inductors



### SPECIFICATION TABLE

PART NUMBER	INDUCTANCE ( $\mu$ H)	DCR (m $\Omega$ ) (Max.)	Isat (A) (Max.)	Irms (A) (Max.)	TEST FREQ. ( f )
SDS127BH-R47M-LF	0.47 $\pm$ 20%	2.438	56.0	17.9	100KHz
SDS127BH-1R0M-LF	1.00 $\pm$ 20%	3.913	40.0	15.5	100KHz
SDS127BH-1R5M-LF	1.50 $\pm$ 20%	4.263	31.1	13.5	100KHz
SDS127BH-2R2M-LF	2.20 $\pm$ 20%	5.025	25.5	12.5	100KHz
SDS127BH-3R3M-LF	3.30 $\pm$ 20%	7.088	21.5	10.5	100KHz
SDS127BH-4R7M-LF	4.70 $\pm$ 20%	11.463	16.5	8.25	100KHz
SDS127BH-6R8M-LF	6.80 $\pm$ 20%	14.500	13.3	7.34	100KHz
SDS127BH-8R2M-LF	8.20 $\pm$ 20%	19.625	12.2	6.32	100KHz
SDS127BH-100M-LF	10.0 $\pm$ 20%	21.500	11.2	6.04	100KHz
SDS127BH-150M-LF	15.0 $\pm$ 20%	30.875	9.66	5.03	100KHz
SDS127BH-220M-LF	22.0 $\pm$ 20%	48.875	7.57	4.00	100KHz
SDS127BH-330M-LF	33.0 $\pm$ 20%	75.00	6.22	3.23	100KHz
SDS127BH-470M-LF	47.0 $\pm$ 20%	89.88	5.28	2.95	100KHz
SDS127BH-680M-LF	68.0 $\pm$ 20%	131.25	4.44	2.44	100KHz
SDS127BH-820M-LF	82.0 $\pm$ 20%	178.75	4.06	2.09	100KHz
SDS127BH-101M-LF	100 $\pm$ 20%	203.75	3.64	1.96	100KHz
SDS127BH-151M-LF	150 $\pm$ 20%	308.75	3.01	1.59	100KHz
SDS127BH-221M-LF	220 $\pm$ 20%	470.00	2.43	1.29	100KHz
SDS127BH-331M-LF	330 $\pm$ 20%	717.50	2.01	1.04	100KHz
SDS127BH-471M-LF	470 $\pm$ 20%	1076.25	1.68	0.85	100KHz
SDS127BH-681M-LF	680 $\pm$ 20%	1350.0	1.39	0.76	100KHz
SDS127BH-821M-LF	820 $\pm$ 20%	1837.5	1.27	0.65	100KHz
SDS127BH-102M-LF	1000 $\pm$ 20%	2075.0	1.14	0.61	100KHz

- DC current at which the inductance drops 30% (typ) from its value without current.
- Operating temperature range -40 $^{\circ}$ C to +125 $^{\circ}$ C.
- Electrical specifications at 25 $^{\circ}$ C .
- Reel Qty : 400pcs